


- Totally enclosed three phase motor with cooling fan
- Alum. housing, durable, light weight motor
- 2P/4P/6P available
- Power: 0.18KW-2.2KW
- Removable foot B3
- IEC B5, B14 standard flange available, IEC 63-112
- Interior installed DC brake available
- Gasketed conduit box
- Application: Pumps, compressors, fans, conveyors, machine tools and other general purpose three phase applications.




AC 鋁殼馬達 TEFC Industrial Electric AC Motors


型號對照表 CATAL. No. GUIDE

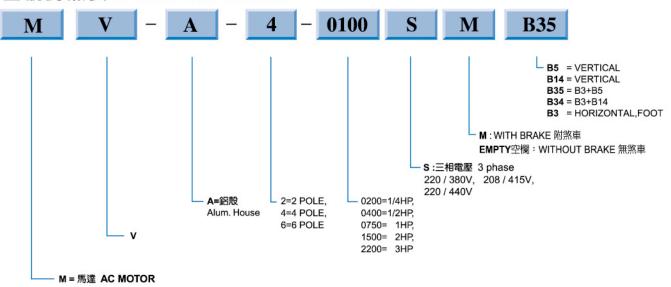



尺寸表 Dimension


馬力 HP	IEC		4.7.00						ēπ ch-st						计前 71							WITH			
		KW		腳架Foot Dimension			軸 Shaft					法蘭 Flange						BRAKE							
		2P	4P	6P	Α	В	С	Н	D	LE	EB	GA	F	DB	P	M	N	S	LA	Т	L	Ll	AD	НС	AC
B5	63M	0.2	0.2	•				. · ·	11	23	20	12.5	4	M4	140	115	95	9	8	3.0	205	226	110	174	118
	71M	0.4	0.4	0.2	-	-	-	-	14	30	25	16	5	M5	160	130	110	10	8	3.5	240	251	120	192	145
	80M	0.75	0.75	0.4		-	, ž	-	19	40	35	21.5	6	M6	200	165	130	11	13	3.5	274	283	130	210	162
	90L	1.5	1.5	0.75	÷	-	-	-	24	50	45	27	8	M8	200	165	130	12	13	3.5	332	342	138	228	181
	100L	2.2	2.2	1.5	12	2	-		28	60	55	31	8	M10	250	215	180	14	14	4	373	383	145	245	202
B14	63M	0.2	0.2	-	-	-	11- 8	-	11	23	20	12.5	4	M4	90	75	60	M5	-	2.5	205	226	110	174	118
	71M	0.4	0.4	0.2	-	-	-	-	14	30	25	16	5	M5	105	85	70	M6	-	2.5	240	251	120	192	145
	80M	0.75	0.75	0.4	-	-	-	-	19	40	35	21.5	6	M6	120	100	80	M6	-	3	274	283	130	210	162
	90L	1.5	1.5	0.75	-	-	-	-	24	50	45	27	8	M8	140	115	95	M8	-	3	332	342	138	228	181
	100L	2.2	2.2	1.5	-	-	-	-	28	60	55	31	8	M10	160	130	110	M8	-	3.5	373	383	145	245	202
В3	63M	0.2	0.2	-	100	80	40	63	11	23	20	12.5	4	M4	-	-,	7	7		-	205	226	110	174	118
	71M	0.4	0.4	0.2	112	90	45	71	14	30	25	16	5	M5	-	-	-	-	-	-	240	251	120	192	145
	80M	0.75		0.4	125	100	50	80	19	40	35	21.5	6	M6	-	-	-	-	-	-	274	283	130	210	162
	90L	1.5	1.5	0.75	140	125	56	90	24	50	45	27	8	M8	-	-	-	7		-	332	342	138	228	181
	100L	2.2	2.2	1.5	160	140	63	100	28	60	55	31	8	M10	-	-	-	-	-	-	373	383	145	245	202
	63M	0.2	0.2	-	100	80	40	63	11	23	20	12.5	4	M4	140	115	95	9	8	3	205	226	110	174	118
	71M	0.4	0.4	0.2	112	90	45	71	14	30	25	16	5	M5	160	130	110	10	8	3.5	240	251	120	192	145
B35	80M	0.75	0.75	0.4	125	100	50	80	19	40	35	21.5	6	M6	200	165	130	11	13	3.5	274	283	130	210	162
	90L	1.5	1.5	0.75	140	125	56	90	24	50	45	27	8	M8	200	165	130	12	13	3.5	332	342	138	228	181
	100L	2.2	2.2	1.5	160	140	63	100	28	60	55	31	8	M10	250	215	180	14	14	4	373	383	145	245	202
В34	63M	0.2	0.2	-	100	80	40	63	11	23	20	12.5	4	M4	90	75	60	M5	-	2.5	205	226	110	174	118
	71M	0.4	0.4	0.2	112	90	45	71	14	30	25	16	5	M5	105	85	70	М6	-	2.5	240	251	120	192	145
	80M	0.75	0.75	0.4	125	100	50	80	19	40	35	21.5	6	M6	120	100	80	M6	-	3	274	283	130	210	162
	90L	1.5	1.5	0.75	140	125	56	90	24	50	45	27	8	M8	140	115	95	M8	-	3	332	342	138	228	181
	100L	2.2	2.2	1.5	160	140	63	100	28	60	55	31	8	M10	160	130	110	M8	-	3.5	373	383	145	245	202

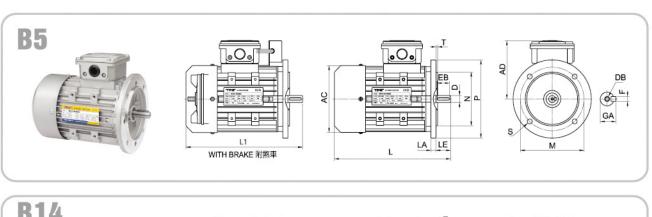

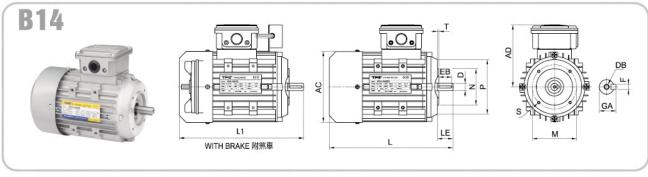

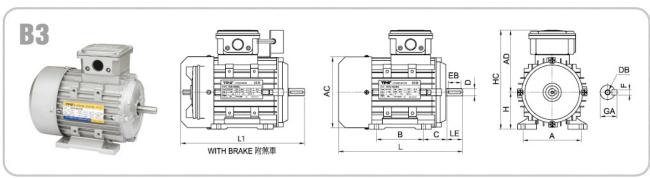

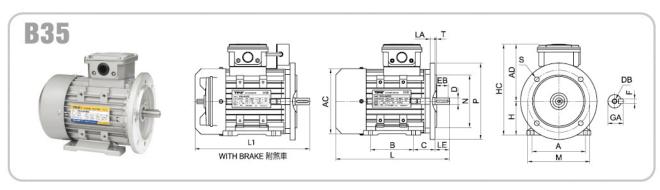

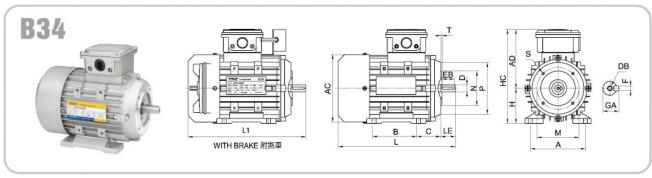





TECHNOLOGY 信頼性ある製品 PERFECTION 卓越したの性能 MOTORS & DRIVES ● GUARANTEE 保證したの品質

HEAD OFFICE:

TAIWAN PRECISION GEAR CORP.

TEL: 886-4-25351329 FAX: 886-4-25351467 ▼E-mail: tpgcorp@ms13.hinet.net

(CHINA)

TPG MOTORS & DRIVES (CHINA) CO.LTD
TEL: 86-769-22335207 FAX: 86-769-22335203
FE-mail: tpg_cn@yahoo.com.tw

(THAILAND)

TPG MOTORS & DRIVES (THAILAND) CO.LTD.
TEL:66-2-2778878 FAX:66-2-2779788

E-mail: tpg_th@yahoo.com

(VIETNAM)

TPG VIETNAM AGENT TEL: 84-8-7503001 FAX: 84-8-7503005 E-mail: universaltrade@hcm.vnn.vn

(INDIA)

TPG MOTORS & DRIVES (INDIA) PVT. LTD. TEL: 91-44-23634199 FAX:91-44-23634299

E-mail: tpg_in@yahoo.com

(MALAYSIA)

TPG MOTORS & DRIVES (MALAYSIA) SDN BHD TEL:60-3-90743686 FAX:60-3-90767866 FE-mail: tpg_ma@yahoo.com

(INDONESIA)
TPG MOTORS & DRIVES (INDONESIA) CO.,LTD
TEL:62-21-45846725 FAX:62-21-45846726

E-mail: tpg_ind@yahoo.com

(SINGAPORE)

TPG MOTORS & DRIVES (SINGAPORE) PTE LTD

TEL:65-62456007 FAX:65-62456017 ✓ E-mail: tpgsin@singnet.com.sg